

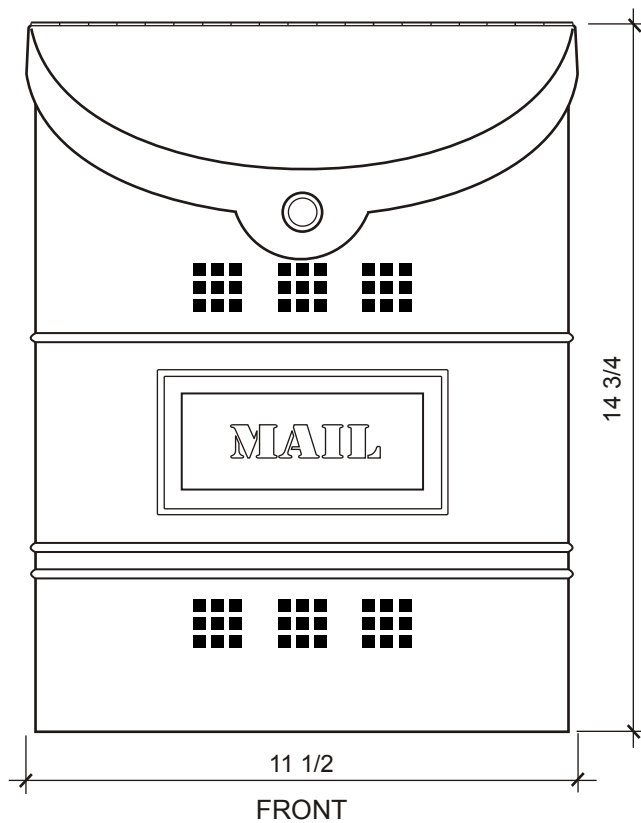


MODEL	MATERIAL	OVERALL SIZE	INSTALLATION	FINISHES	HARDWARE
<b>E2M</b> <b>E2BK</b>	20 Gauge 304 grade stainless steel or galvanized steel	11 1/2" W 14 3/4" H 5" D	Wall mounted	Polished stainless steel or satin black paint	Screws and plastic anchors included.

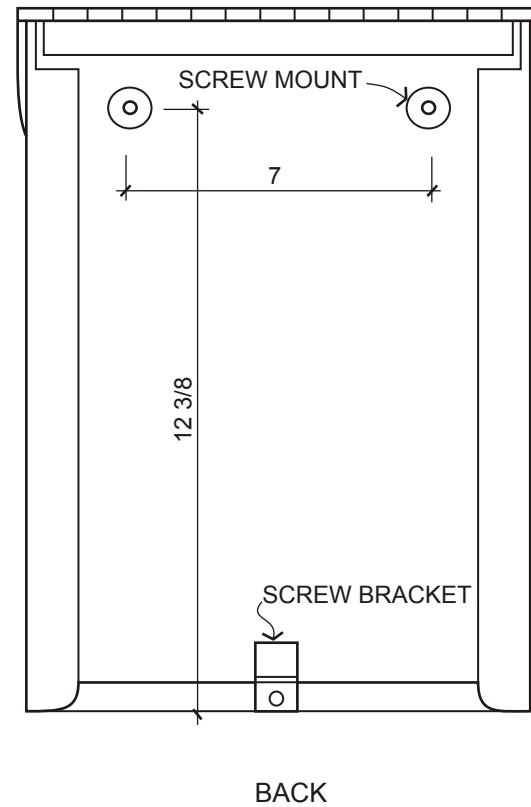

IMAGES NOT TO SCALE

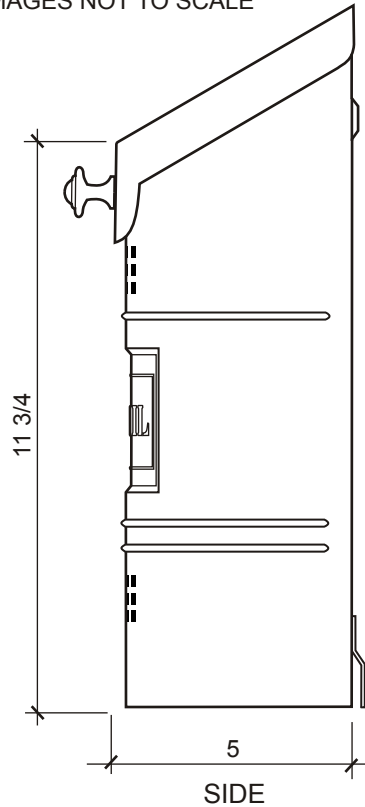

### Maintenance

For the stainless steel model, clean with mild soap and water. In regions with high levels of salt content in the air, apply a coat of car wax after cleaning a couple of times a year.

Stainless steel does corrode in harsh environments but at a slower rate than regular steel. Frequent maintenance is recommended to prevent salt built up on the surface.

### Installation Instructions

- 1 Remove knob from back panel and install on lid. Knob is located in one of the screw holes inside the mailbox back panel.
- 2 Determine the location and height of where the mailbox is to be installed and marked screw holes. Drill pilot holes for screws or install plastic anchors when necessary depending on wall surface material.
- 3 Install mailbox using screws provided.